

INSTALLATION INSTRUCTIONS


TGH.2603-9

PLEASE NOTE:

Please read and understand the instructions before installation! Our manufacturer is not responsible for any personal injury or damage to your vehicle that occurs during the installation or use of this product.

NOTE: This product is intended to be used primarily for decorative purposes and should not be relied upon in any way to protect your safety.

CONTENTS

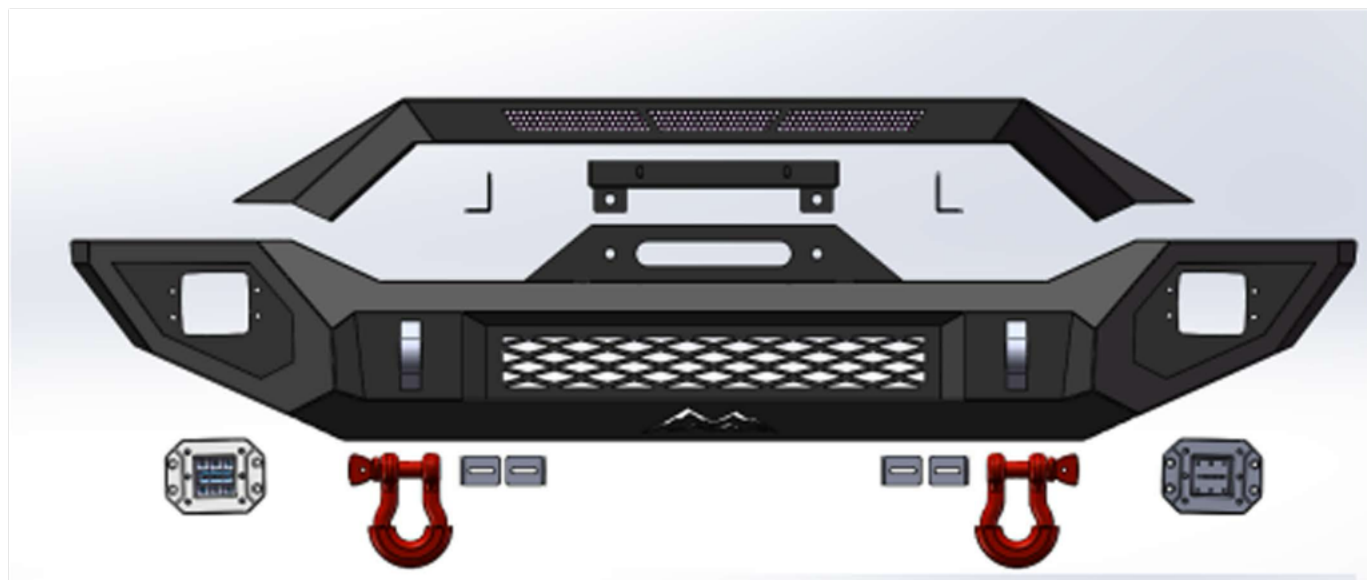

No.	Part Name	Model /	Unit	Qty	Part Image	Remarks
1	Hex Head Bolt, M8	M8*20	PCS	4		Light Bracket
2	Flange Nut, M8	M8	PCS	4		Light Bracket
3	Flat Washer, M8	M8161	PCS	4		Light Bracket
4	Spring Lock Washer	D8	PCS	4		Light Bracket
5	Socket Cap Head Screw	M12*25	PCS	2		License Plate Bracket
6	201 Stainless Steel Flat Washer	M12301.5	PCS	2		License Plate Bracket
7	201 Stainless Steel Flange Nut	D12	PCS	2		License Plate Bracket
8	Socket Cap Head Bolt	M6*16	PCS	6		Lamp Support
9	Flat Washer, M6	M6121	PCS	6		Lamp Support
10	Nylon Insert Lock Nut, M6	M6	PCS	6		Lamp Support

INSTALLATION INSTRUCTIONS

No.	Part Name	Spec.	Unit	Qty	Part Image	Remarks
1	M12 Hex Head Bolt	M12*35	PCS	2		Vehicle Assembly
2	Flat Washer	M12302	PCS	8		Vehicle Assembly
3	Spring Lock Washer	D12	PCS	8		Vehicle Assembly
4	M12 Hex Nut	M12	PCS	6		Vehicle Assembly

Step 1



Use these bolts "E", bolts "F", and bolts "G" to assemble part "Y" and part "Z"



Step 2

Then remove the original front bumper.

INSTALLATION INSTRUCTIONS

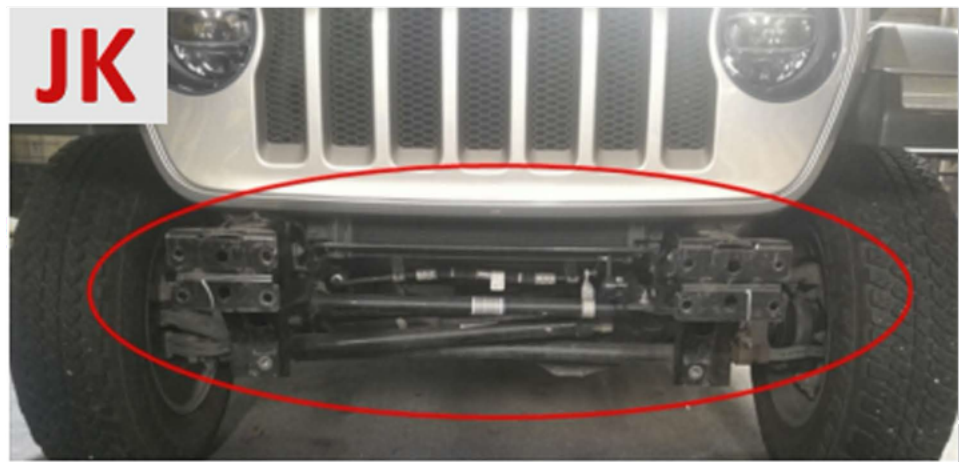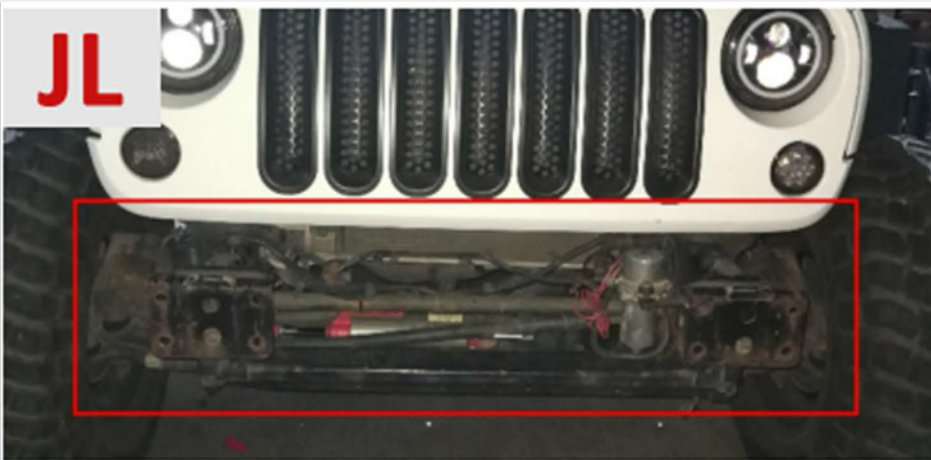

Step 3

Tighten bumper part "y" (Same installation method for JL and JK)

(1) Install part "B", part "C" and part "D" on the red circle bolt holes.





INSTALLATION INSTRUCTIONS

(2) Install part "A", part "C", and part "D" on the yellow ring bolt holes.




Step 4

Repeat the above steps on the other side.

Step 5

Install part "X" to part "y" (JL and JK).

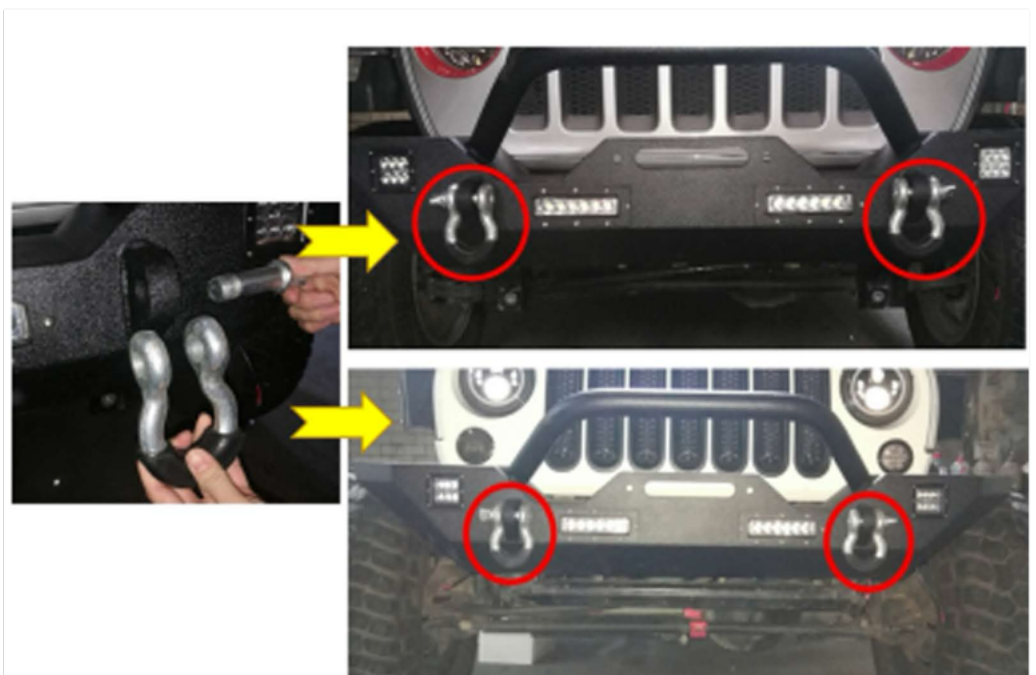



INSTALLATION INSTRUCTIONS

Step 6 Installation completed.

