

INSTALLATION INSTRUCTIONS

TGH-2610-9

PLEASE NOTE:

Please read and understand the instructions before installation! Our manufacturer is not responsible for any personal injury or damage to your vehicle that occurs during the installation or use of this product.

NOTE: This product is intended to be used primarily for decorative purposes and should not be relied upon in any way to protect your safety.

CONTENTS



No.	Part Name	Spec.	Unit	Qty	Part Image	Remarks
1	Socket Cap Head Screw	M12*25	pcs	2		License Plate Bracket
2	Flat Washer	M12*30*1.5	pcs	2		
3	Flange Nut	M12	pcs	2		



No.	Part Name	Spec.	Unit	Qty	Part Image	Remarks
1	M12 Hex Head Bolt	M12*35	PCS	2		Vehicle Assembly
2	Flat Washer	M12*30*2	PCS	8		Vehicle Assembly
3	Spring Lock Washer	D12	PCS	8		Vehicle Assembly
4	M12 Hex Nut	M12	PCS	6		Vehicle Assembly



INSTALLATION INSTRUCTIONS

Step 1

Then remove the original front bumper.

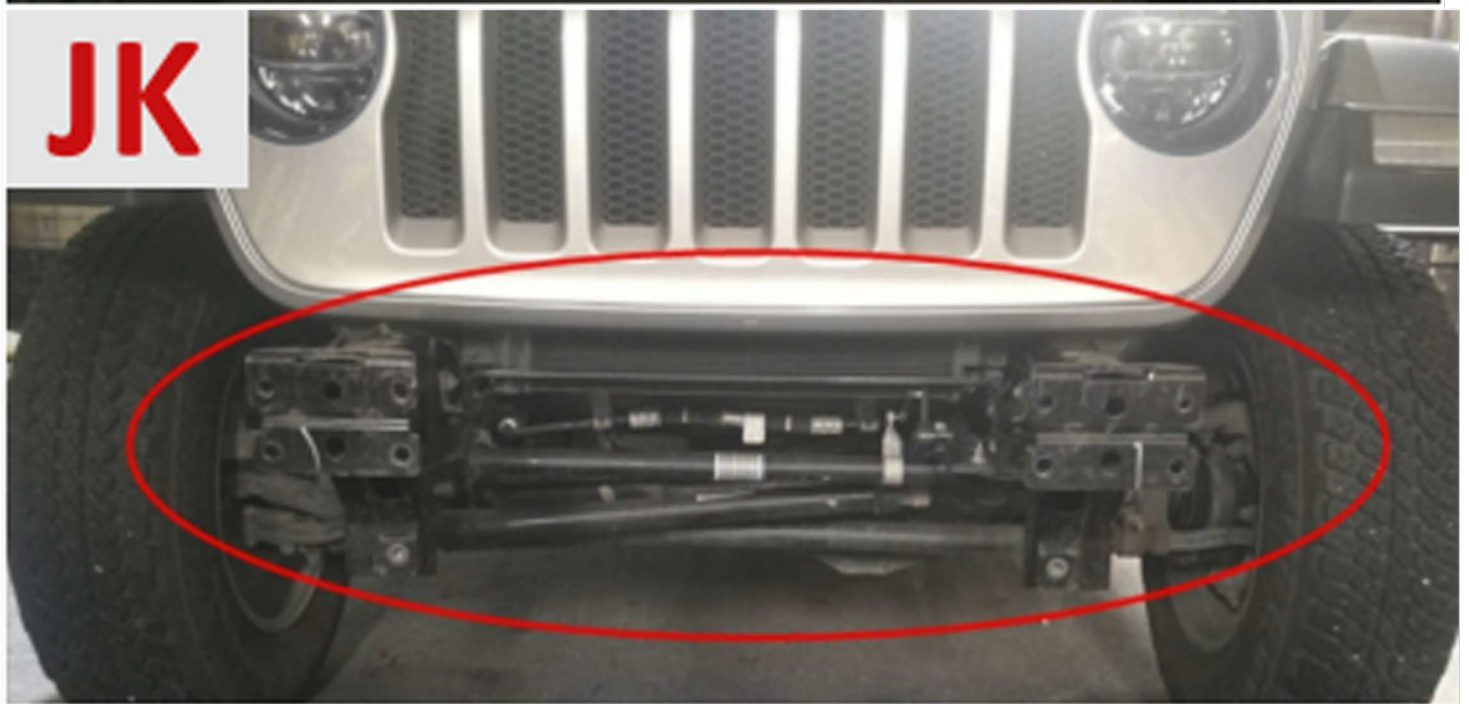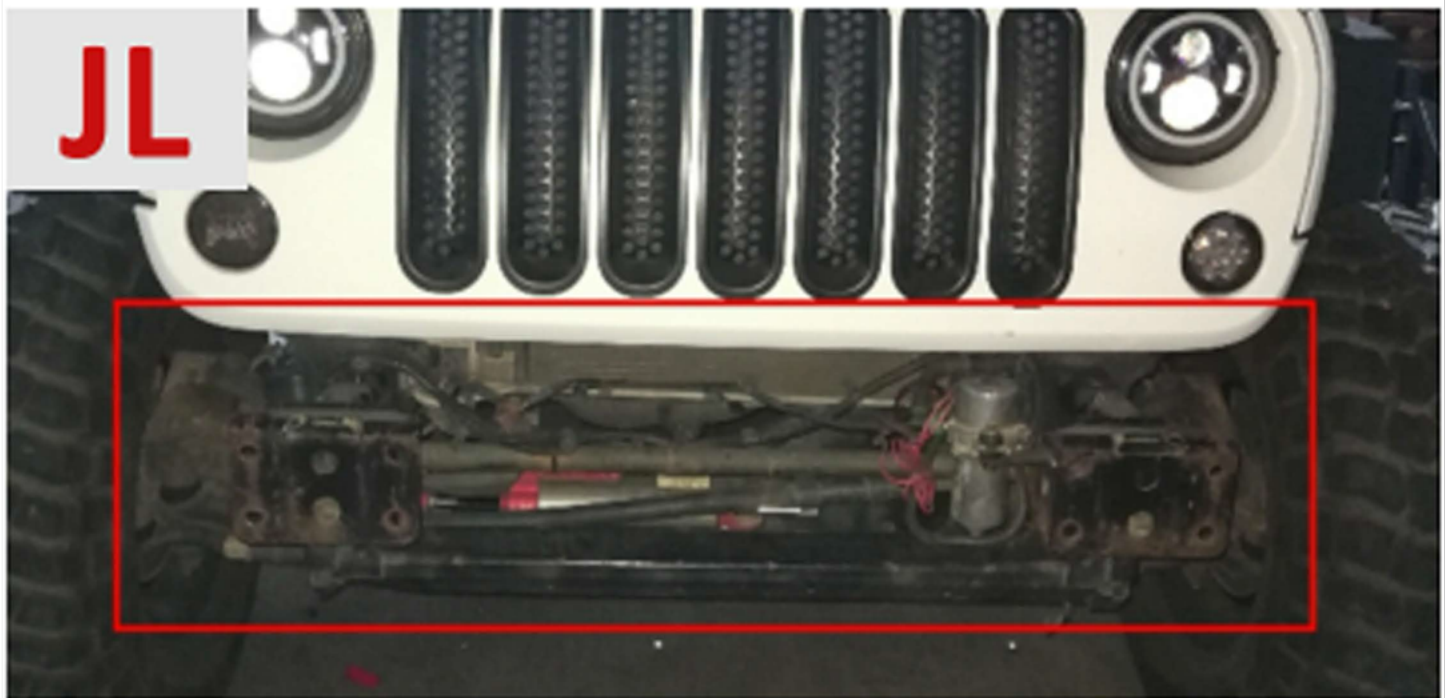



INSTALLATION INSTRUCTIONS

Step 2

Tighten bumper part "y" (Same installation method for JL and JK)

(1) Install part "B", part "C" and part "D" on the red circle bolt holes.



INSTALLATION INSTRUCTIONS

(2) Install part "A", part "C", and part "D" on the yellow ring bolt holes.




Step 3

Repeat the above steps on the other side.

Step 4

Install part "X" to part "y" (JL and JK).

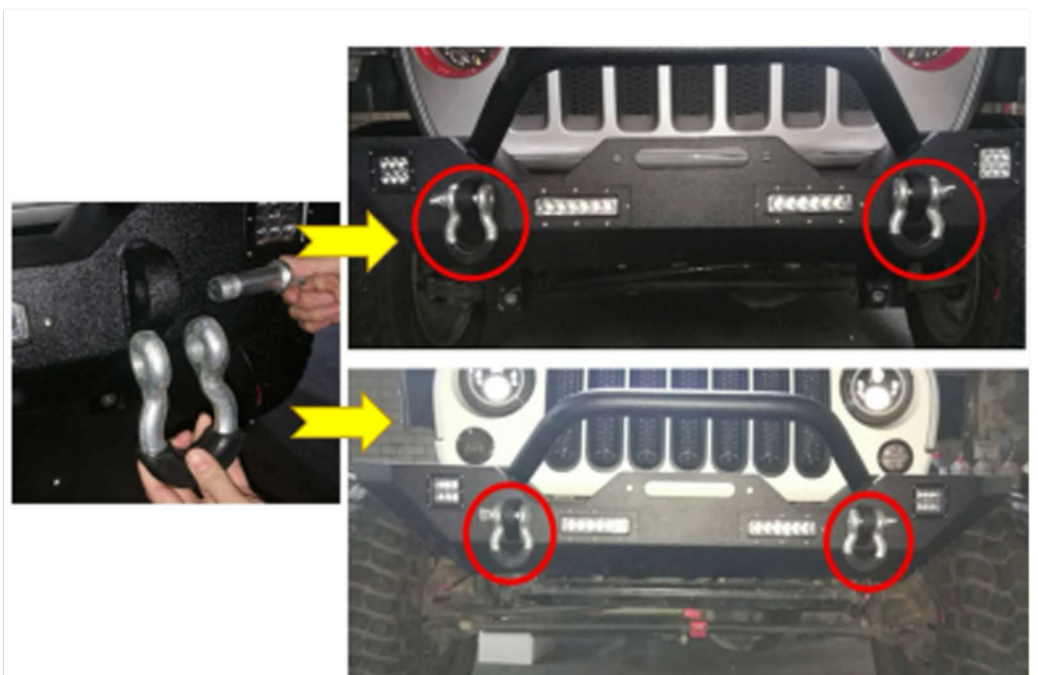



INSTALLATION INSTRUCTIONS

Step 5 Installation completed.

