

INSTALLATION INSTRUCTIONS

TGH.2605-9

PLEASE NOTE:

Please read and understand the instructions before installation! Our manufacturer is not responsible for any personal injury or damage to your vehicle that occurs during the installation or use of this product.

NOTE: This product is intended to be used primarily for decorative purposes and should not be relied upon in any way to protect your safety.

CONTENTS



No.	Part Name	Spec.	Unit	Qty	Part Image	Remarks
1	M8 Hex Head Bolt	M8*20	PCS	6		Bull Bar
2	M8 Flange Nut	M8	PCS	6		Bull Bar
3	M8 Flat Washer	M8*16*1	PCS	6		Bull Bar
4	Spring Lock Washer D8	D8	PCS	6		Bull Bar
5	Socket Cap Head Screw	M12*25	PCS	2		License Plate Bracket
6	201 Stainless Steel Flat Washer	M12301.5	PCS	4		License Plate Bracket
7	M12 Flange Nut	M12	PCS	2		License Plate Bracket
8	M6 Socket Cap Head Bolt	M6*16	PCS	2		Lamp Bracket
9	201 Stainless Steel Flat Washer M6	M6*16*1	PCS	4		Lamp Bracket
10	M6 Nylon Insert Lock Nut	M6	PCS	2		Lamp Bracket

INSTALLATION INSTRUCTIONS

No.	Part Name	Spec.	Unit	Qty	Part Image	Remarks
1	M12 Hex Head Bolt	M12*35	PCS	2		Vehicle Assembly
2	Flat Washer	M12*30*2	PCS	8		Vehicle Assembly
3	Spring Lock Washer	D12	PCS	8		Vehicle Assembly
4	M12 Hex Nut	M12	PCS	6		Vehicle Assembly

Step 1


Use these bolts "E", bolts "F", and bolts "G" to assemble part "Y" and part "Z"



Step 2

Then remove the original front bumper.

INSTALLATION INSTRUCTIONS

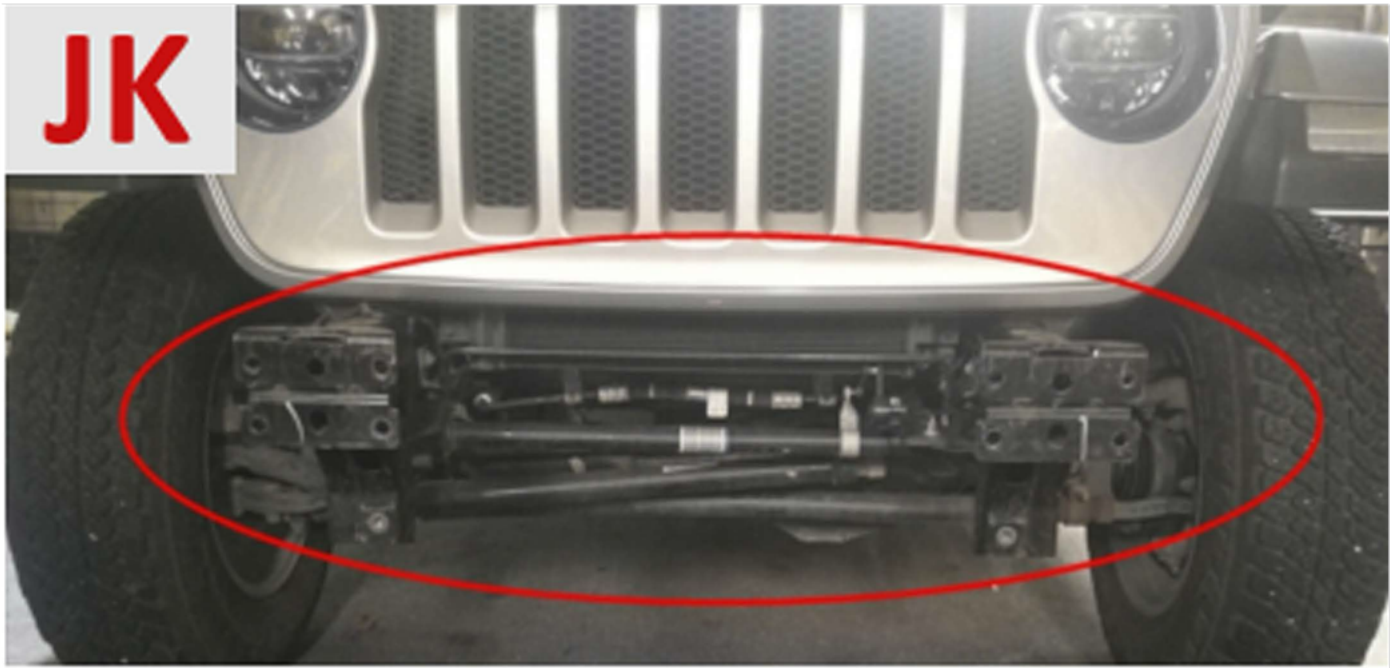

Step 3

Tighten bumper part "y" (Same installation method for JL and JK)

(1) Install part "B", part "C" and part "D" on the red circle bolt holes.





INSTALLATION INSTRUCTIONS

(2) Install part "A", part "C", and part "D" on the yellow ring bolt holes.




Step 4

Repeat the above steps on the other side.

Step 5

Install part "X" to part "y" (JL and JK).

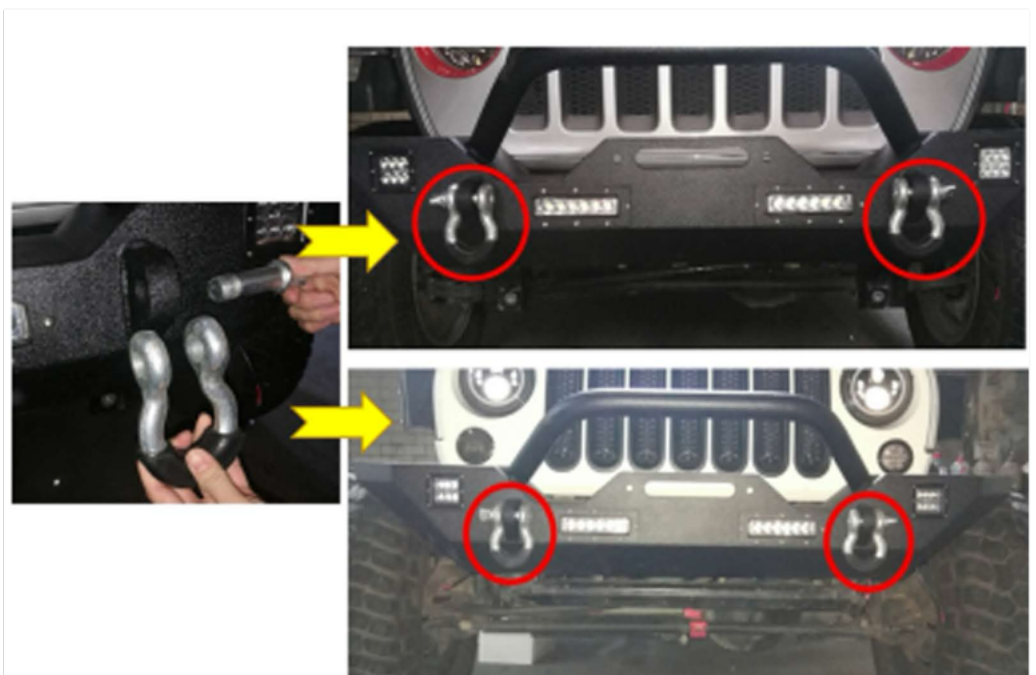

INSTALLATION INSTRUCTIONS

Step 6 Installation completed.

