INSTALLATION INSTRUCTIONS

TGH.B014-9

PLEASE NOTE:
Please read and understand the instructions before installation!Our manufacturer is not responsible for any personal injury or damage to your vehiclethat occurs during the installation or use of this product.

NOTE: This product is intended to be used primarily for decorative purposes andshould not be relied upon in any way to protect your safety.

CONTENTS





Step 1

First disconnect the wiring harness before removing the door.Remove the plastic cover at the bottom of the B-pillar to gain access to theelectrical connector. Loosen the red locking tab and pull down on the connectorto remove the back strap from the hook inside the vehicle.

NOTICE: Once the backstrap is loosened, the door will swing freely and may causedamage to the vehicle. Do not release the door when disconnecting the backstrap.

INSTALLATION INSTRUCTIONS

Step 2

Remove the Torx nuts at the bottom of each stock hinge pin.Set these nuts aside for reinstallation on the half-opening doorsTo remove the factory doors, carefully lift the doors upwarduntil the hinge pins are completely off the hinges.

Step 3

Place the door on the floor with a blanket or large pieceof cardboard separating it from the floor to prevent scratcheson the outside of the door.

Step 4


Make sure the right hinge is installed in the correct position,you can compare it with the picture below.



INSTALLATION INSTRUCTIONS

Attention : As shown in thepictures. The lower door hinges have strapsinstalled on the back. Don't forget to install them.As shown in the picture below.



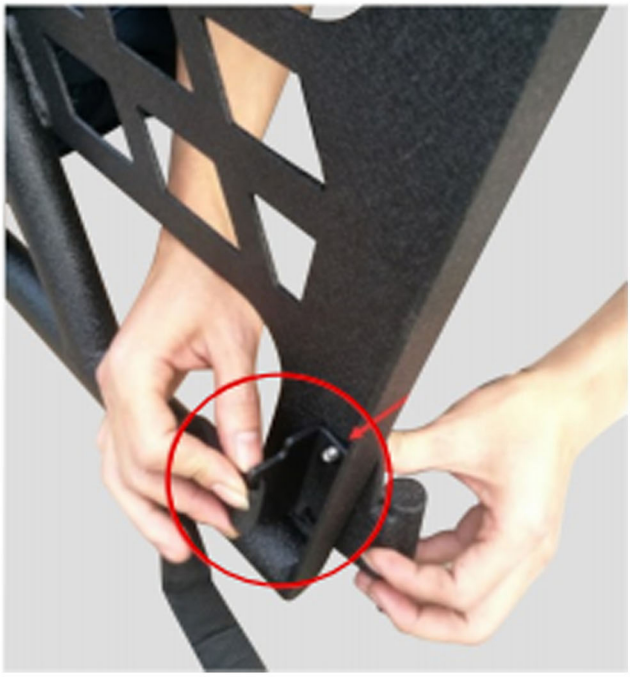


Step 5
Install the door assembly.
Install hinges and other components to the door.
A.Front door assembly installation.





INSTALLATION INSTRUCTIONS

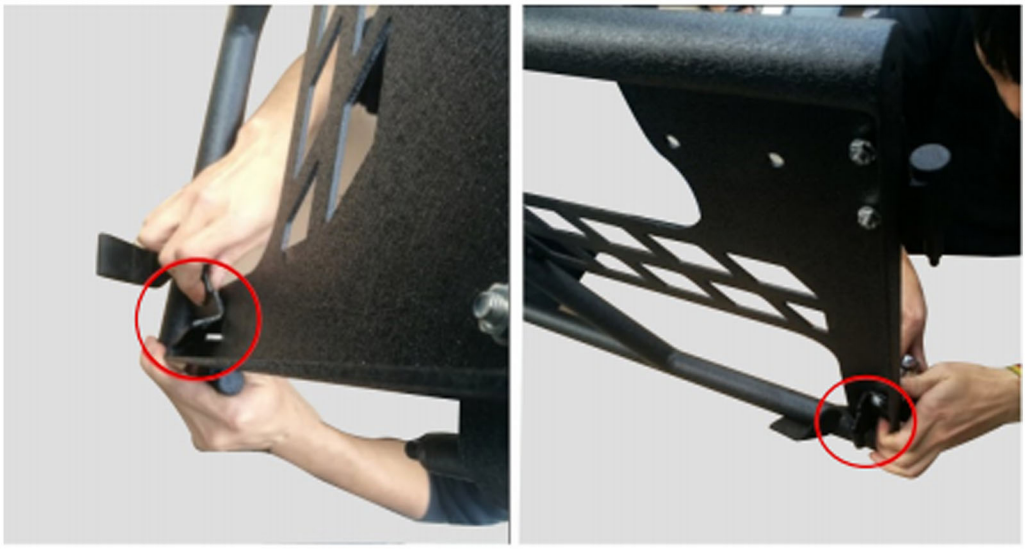


(1) Install the front upper hinge with the screws in the package.
(2)Install the front lower hinge with the screws in the package.

B. The Front door Installation



INSTALLATION INSTRUCTIONS

(3) Slide door onto factory hinge pin. Tighten hinge boltswhen closing door.
(4) Place strap over top of re-taining hook to ensure dooris secured.
(5)install Torx nut on bottom of each factory hinge pin.
Installation Complete.

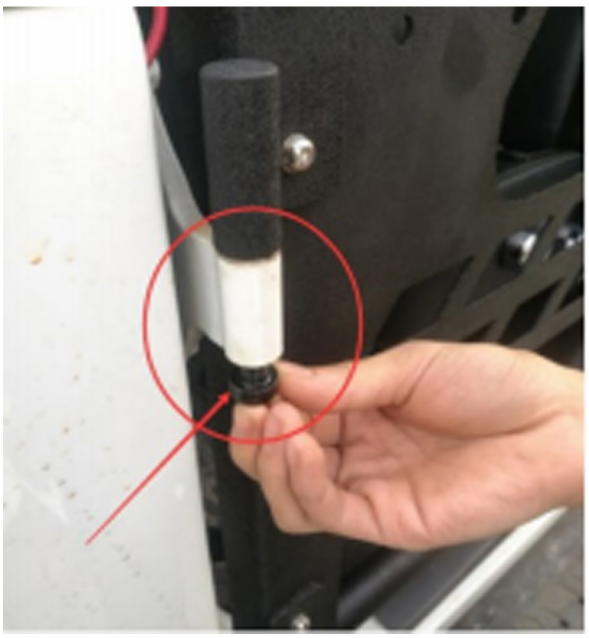

Step 6
Installation complete.Congratulations on a high quality product!

