

INSTALLATION INSTRUCTIONS


TGH.C005-9

IMPORTANT

Please read and understand all instructions before starting this installation. The manufacturer holds no responsibility for any personal injury or damage sustained to vehicle during installation or use of this product.

CAUTION: This product is designed primarily to enhance the appearance of this vehicle and in no way will prevent damage to vehicle, personal injury or death in the event of an accident.

CONTENTS

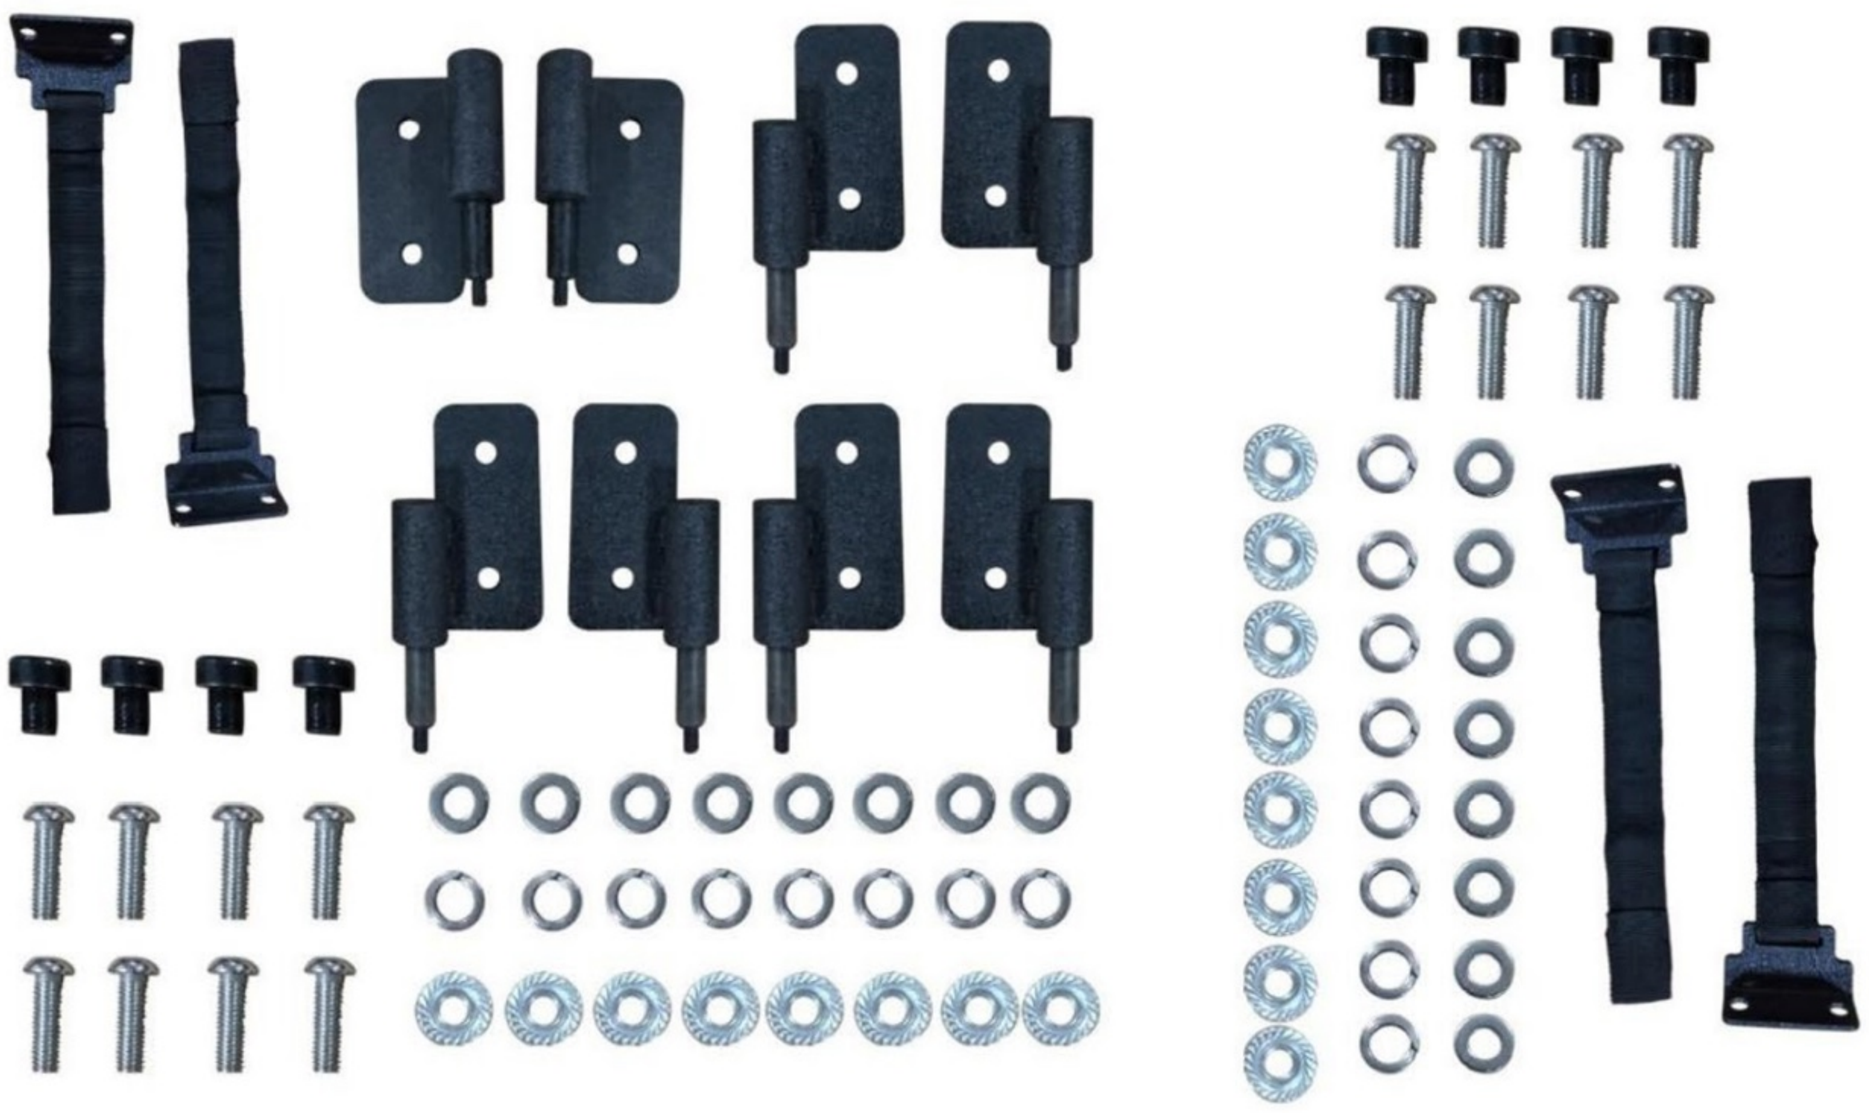

TOOLS REQUIRED

A. 1/4 & 10mm Torque



INSTALLATION INSTRUCTIONS

STEP1

Disconnect wiring harness before removing the door. Remove the plastic cover at the base of the B-pillar to access the electrical connector. Release the red locking tab and pull down on the connector. Next, remove the strap from the hook located inside the vehicle.NOTICE!The door can swing freely once the strap is released potentially causing damage to your vehicle. Do not let go of the door when the strap is disconnected.

STEP2

Remove the Torx nut from the bottom of each factory hinge pin.Set these nuts aside to be re-installed on the Half Doors. To remove the factory doors, carefully lift the door upward until the hinge pins completely clear the hinges. It will be helpful to have someone else assist with this step.

STEP3

Lay the door on the ground, use a blanket or big cardboard between the door and the ground to keep the outside of the door from scratch.


STEP4

Confirm the right hinge installed in the right position, there are the positions you can figure out shown below.(Make sure you installed right hinge on the right position,you can compare with picture showed below).



Attention : There are some differences between the front and rear door' s upper part. As shown in the picture. The hinge at the lower part of doors, they have installed with straps at back. vDon' t forget to install it. Showed Below.



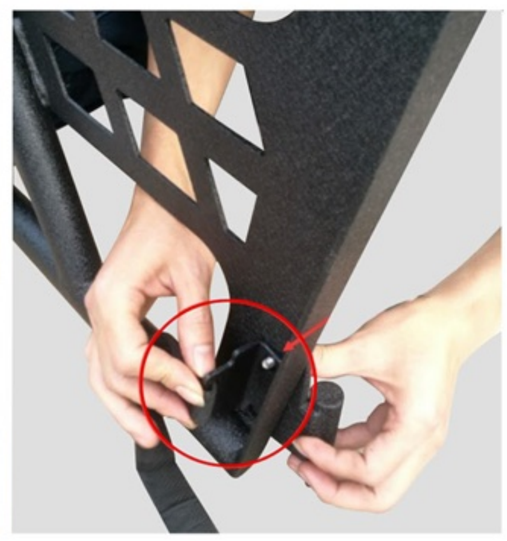




INSTALLATION INSTRUCTIONS

STEP5

Build up door assembly. Install the Hinges and other parts on the door.

A.The Front door assembly installation.

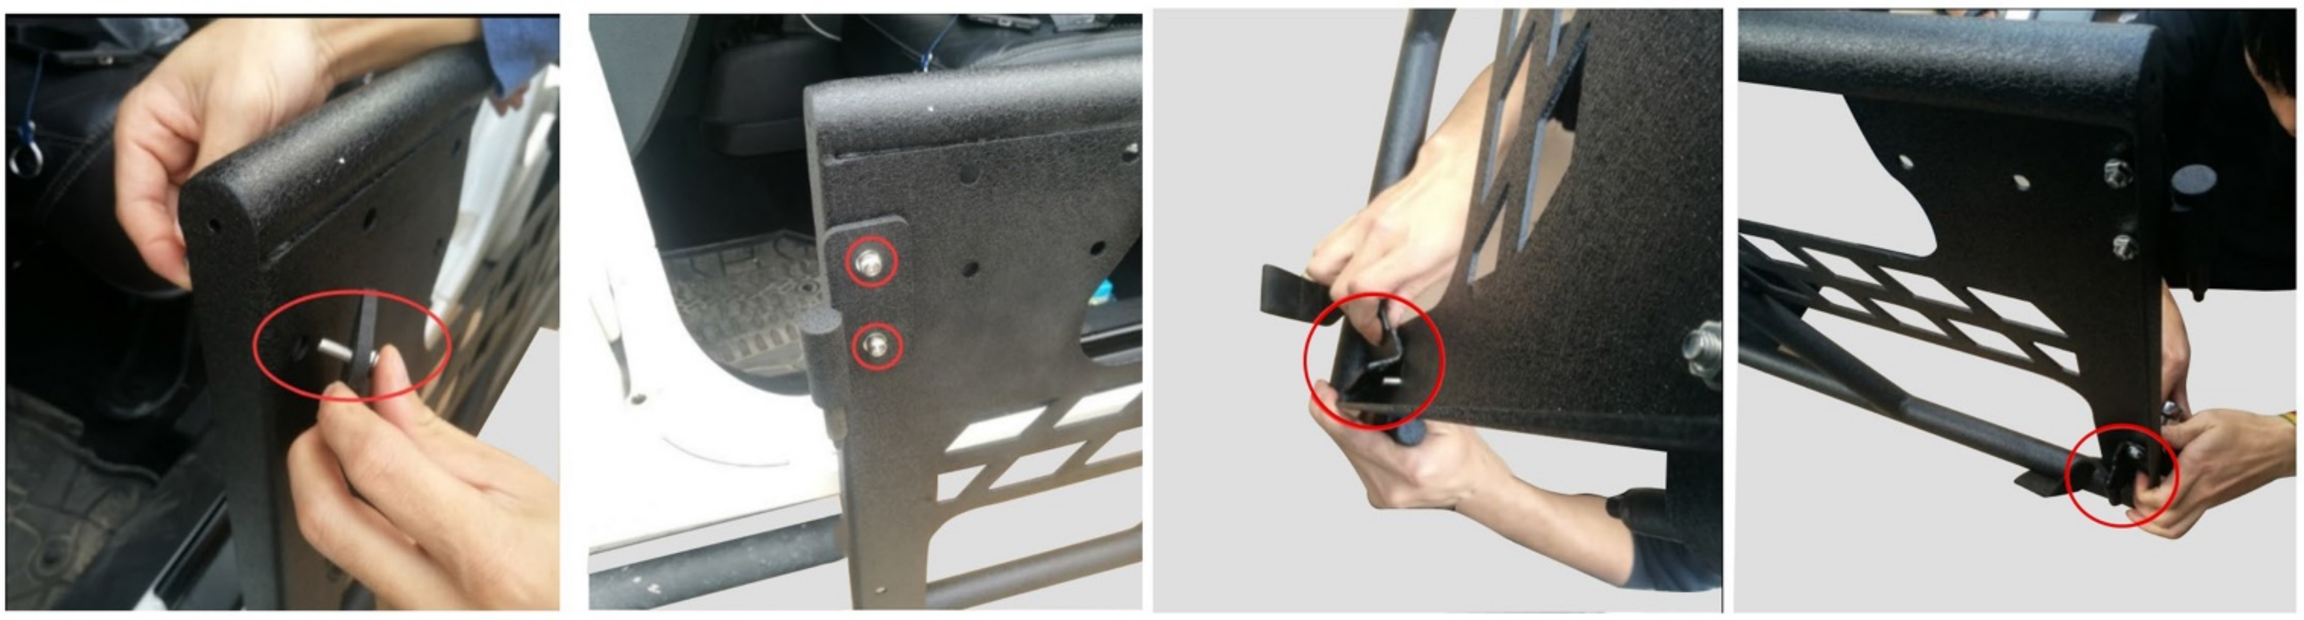

(1)(2)Install the front upper hinge with the screws in the package.
(3)(4)Install the front lower hinge with the screws in the package.

B. The Front door Installation



(5)Slide the door onto the factory hinge pins. Tighten the hinge bolts while the door is closed.
(6)Place the strap overthe top of the retaining hook and make sure the door is secured.
(7)Install the Torx nut at the bottom of eachfactory hinge pin. Then the Front door installation is over.

INSTALLATION INSTRUCTIONS

STEP6

The Rear door installation. The difference between Front and Rear door installation is the upper hinge.If you choose right hinge to install. Following work is just seem like the Front door.

STEP7

The installation is complete. We hope you enjoy a wonderful off-road life with this quality Hooke Road product!

