

INSTALLATION INSTRUCTIONS

TGH.H86-9

ATTENTION

Check before installation

- Remove content from box. Verify all parts are present
- Read instructions carefully before starting installation
- DO NOT over torque. Standard operating load for tighten body mount

PLEASE NOTE:

1. Need Assistance With Your Order?

If you encounter any issues with your product, such as missing parts, damaged components, or installation difficulties, please contact our support team first. We will provide a quick solution and help resolve your concerns without the need to return large or heavy items.

2. Contact Support Before Starting a Return

Before submitting a refund or return request, please get in touch with our customer service team. Our specialists can assist with troubleshooting and provide the most efficient solution for your situation.







3. Important Safety Disclaimer

The manufacturer is not responsible for any damage, injury, or loss caused by incorrect installation, improper use, modification, or failure to follow the provided instructions.



INSTALLATION INSTRUCTIONS

TABLE OF CONTENTS

	Part Name	Material	Part Image	Quantity
A	Mounting Base	Textured Black		1Left 1Right
B	Base Single-Sided EVA Foam Tape 1	Black		1Left 1Right
C	Base Single-Sided EVA Foam Tape 2	Black		1Left 1Right
D	Side Plate	Textured Black		1Left 1Right
E	Cross Tube	Textured Black		1 PCS
F	Light Bar Bracket	Textured Black		2 PCS
G	Front Tube	Textured Black		1Left 1Right
H	Rear Tube	Textured Black		1Left 1Right
I	Rear Tube Joint Connector	PP		2 PCS
J	Front/Rear Tube Silicone Gasket	Silicone		4 PCS
K	Lower Bent Plate	Textured Black		4 PCS
L	Sliding Nut Plate	Textured Black		4 PCS
M	Cross Tube Rubber	PP		2 PCS
N	Rubber Plug	Ø24		2 PCS
O	4-LED Pod Light			2 PCS

INSTALLATION INSTRUCTIONS

Roll Bar Hardware List:

	Part Name	IMAGE	Model	Qty.
a1	Countersunk Socket Head Screw		M10*35	4
a2	Flat Washer		Φ10*25 *2.0	4
a3	Spring washer		Φ10	4
For Mounting Base				

	Part Name	IMAGE	Model	Qty.
b1	Hex Head Bolt		M8*35	8
b2	Flat Washer		Φ8*20 *2.0	8
b3	Spring washer		Φ8	8
For The Car				

	Part Name	IMAGE	Model	Qty.
c1	Socket Head Cap Screw		M10*35	2
c2	Flat Washer		Φ10*20 *1.5	2
c3	Spring washer		Φ10	2
For Front and rear pipe connection				

	Part Name	IMAGE	Model	Qty.
d1	Socket Head Cap Screw		M8*25	4
d2	Flat Washer		Φ8*20 *1.5	4
d3	Spring washer		Φ8	4
For Cross Tube				

	Part Name	IMAGE	Model	Qty.
e1	Button Head Socket Screw		M5*15	8
e2	Flat Washer		Φ5*12*1	8
e3	Spring washer		Φ5	8
e4	Flange Nut M5		M5	8
For Side Plate				


	Part Name	IMAGE	Model	Qty.
f1	Socket Head Cap Screw		M8*25	4
f2	Flat Washer		Φ8*20 *1.5	8
f3	Spring washer		Φ8	4
f4	Flange Nut M8		M8	8
For Light Bar Bracket				

	Part Name	IMAGE	Model	Qty.
	Allen Key		S=3	1
	Allen Key		S=5	1
	Allen Key		S=6	1
	Allen Key		S=8	1
Installation tools				

INSTALLATION INSTRUCTIONS


STEP 01

Hardware Required: c1, c2, c3
Components: G, I, H, N

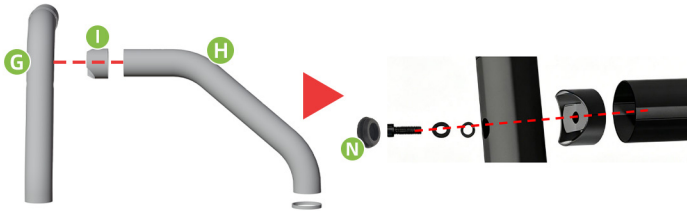


STEP 05

Hardware Required: e1, e2, e3, e4
Components: D

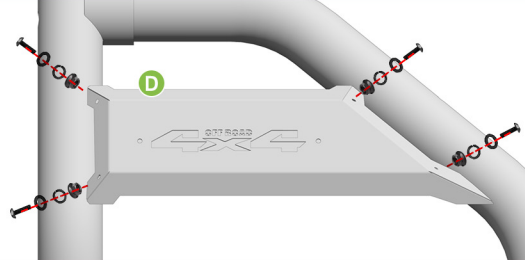


STEP 02

Hardware Required: a1, a2, a3
Components: G, A, H, J

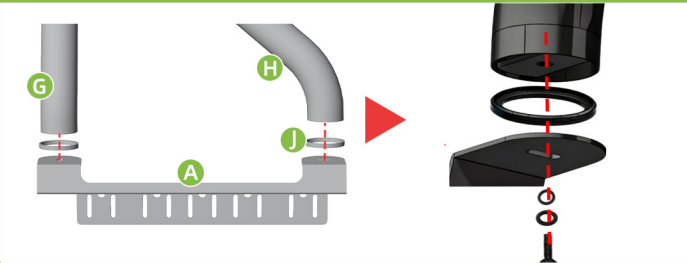

STEP 06

Hardware Required: f1, f2, f3, f4
Components: F

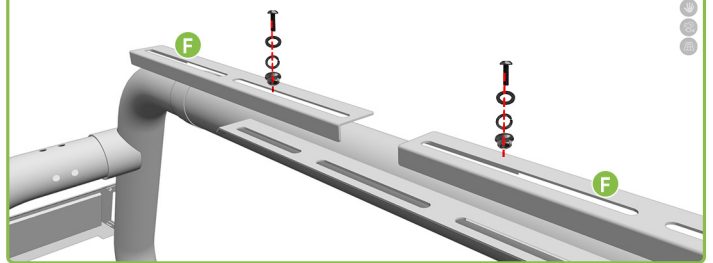


STEP 03

Hardware Required: d1, d2, d3
Components: G, M, E




STEP 07

Hardware Required: f1, f2, f3, f4
Components: o

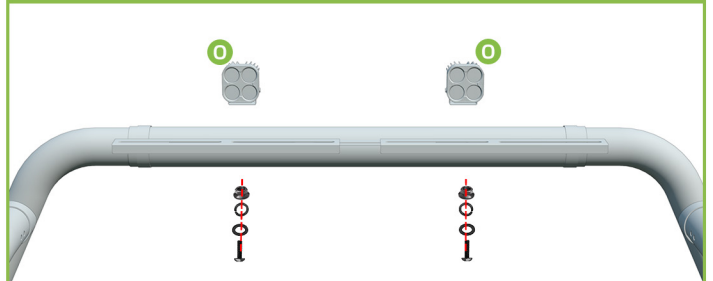

STEP 04

Hardware Required: b1, b2, b3
Components: A, B, C, L, K

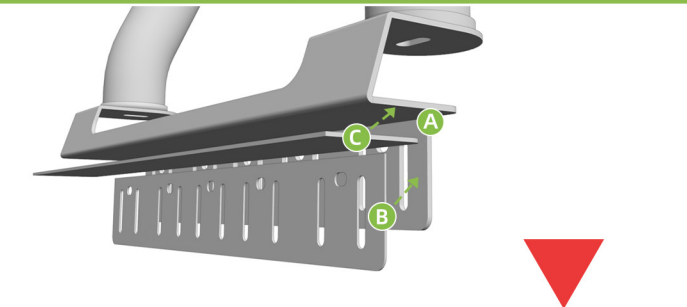

TWO INSTALLATION VARIATIONS

(Choose the installation style matching your vehicle model)



① Models With Track:
Hardware K is not required



② Models Without Track:
Hardware K is required

WARNING

For lighting wiring installation,
please consult a qualified professional.

